



NAEEM ZAFAR INDUSTRIES

Deals in Tractors, Agricultural Machinery & Implements

Company Profile & Product Range



About Us



Zafar Mehmood ul Hassan
Chairman and Chief Executive

Naeem Zafar Industries was established in 1999. The company is one of the pioneers in Pakistan for exporting the Tractors, Agricultural Machinery and a range of Implements. Naeem Zafar Industries is the subsidiary of "ZAOK GROUP OF COMPAINES". Agriculture sector being the dominant sector of Pakistan's economy, as a market of material products contribute substantially in and outside the country. The Naeem Zafar Industries has the endowment to fulfill the multidimensional needs of National and Multinational customers.

The company is exporting his products almost to the whole world, especially to Australia, France, Holland, Spain, England, Kenya, south Africa, Nigeria, Tanzania, Tunisia, Sudan, UAE, Jordan, Oman, Sri Lanka and Bangladesh etc. With the support of its highly qualified and Professional team developed and maintain highest service standards in the company and of course with an ever increasing customer support Naeem Zafar Industries showed an unprecedented growth within very short period of time.

We believe that each customer is a long term business partner and we strive to meet their requirements swiftly and professionally.

MASSEY FERGUSON MF -240 (50 HP)

The most popular tractor in the country

- Most economical in 50 HP range.
- Rugged, maneuverable and compact.
- Easy accessibility to service points.
- Ideal, versatile, all round tractor.
- Spring Suspension deluxe Seat.
- Availability of parts & services facilities at your doorstep.
- Fuel Efficient, High Performance Engine



MASSEY FERGUSON MF-260 (60 HP)

A multipurpose tractor

- High performance, Fuel efficient, Diesel Turbo charged Engine.
- Less Smoke emission due to Better fuel Burning.
- Oil Cooler Added for Effective Cooling
- Higher PTO Power for Efficient Operation of Tube Wells, Rotavators, Threshers etc.
- Robust Straddle rear Axle
- Efficient Oil Immersed Multi-Disc Brakes.
- Spring Suspension Deluxe Seat.



MASSEY FERGUSON MF-350 PLUS (50 HP)

Power Assisted Steering Powerful Yet Economical

- Robust straddle rear axle with epicyclic reduction unit.
- Durable crown wheel & pinion.
- Hydrostatic power steering
- Heavy-duty front axle & support
- Efficient oil-immersed multi-disc brake system.
- Fuel efficient, high performance engine.
- Easy Accessibility to service/maintenance point.



MASSEY FERGUSON MF-360 (60 HP)

A Multi-purpose Tractor

- Hydrostatic Power Steering .
- Heavy duty front axle & support.
- Water cooled - oil cooler.
- Longer wheel base - greater pulling power.
- Robust straddle rear axle with Epicyclic reduction unit.
- Efficient oil-immersed multi-disc brake system.
- Durable Crown wheel & pinion.
- High PTO power.



MASSEY FERGUSON MF-375 (75 HP)

Power Assisted Steering Powerful Yet Economical

- Durable & highly efficient 4.41 low noise engine.
- New Aerodynamic look with stylish wrapper & grill.
- Oil cooler added for effective cooling.
- Mid mounted bigger balance for reduced engine vibrations and smooth running.
- Robust straddle rear axle with epicyclic reduction unit.
- Hydraulically actuated efficient oil immersed multi-disc brake system.



MASSEY FERGUSON MF-385 (85 HP)

The Long term Partner most powerful yet most economical

- High performance efficient 4.41 low noise engine.
- Reduced Emissions under ECE R49.
- Oil cooler added for effective cooling
- Hydrostatic power steering
- Efficient oil immersed disc brake system.



MASSEY FERGUSON MF-385 (85 HP) 4WD

Edge Over 2WD

- Traction 30% more
- Drawbar power 16% more
- Drawbar pull 34% more
- Tyre Wear 15% more
- Fuel Efficiency 15% more
- Field work speed 13-20% more



HYDRAULIC TIPPING TRAILER NZI-808

Specifications:

Description	Spec. A	Spec. B	Spec. C
Type	Hyd. Tipping	Hyd. Tipping	Hyd. Tipping
Capacity	4-Ton	5-Ton	8 - 10 Ton
Vessel Size	10'x6.5'x2'	11'x6.5'x2'	12'x6.5'x2'
Floor	MS Sheet SWG 10		
Side Wall	MS Sheet SWG 12		
CHassis Frame Lower Channel	8' x 3'	8' x 3'	10' x 3'
CHassis Frame Upper Channel	6' x 3'	6' x 3'	6' x 3'
Axle Length	52"	52"	56"
Axle Outer Dia	5"	5.5"	6"
Axle Wall Thickness	3/8"	3/8"	3/8"
Rims Qty	2	2	4
Rims Size	9.50 - 16	9.50 - 16	8.25 - 20



FARM TRAILER NZI-809

Farm trailer provides cost effective means of farm transportation. All steel body robust construction trailers provide a selection of sizes from 3.5-12 tons.

Specification

Model	NZI-12/1	NZI-12/2	NZI-12/3
Tractor Compatibility	25-30 HP	40-50 HP	60-85 HP
Size	7-12x5x1/2	22x6, 1/2x2; 11x7x2'	
Bed Sheet Gauge	SWG 12	SWG 12	SWG 12
Side Sheet Gauge	SWG 12	SWG 12	SWG 12
Axle Size	4-1/2"x3/8"	4-1/2x3/8	4-1/2x3/8
Frame channel Size	7"x3"	7"x3"	7"x3"
Type Size	7.50 x 10	9.00 x 16	8.25x20
No. of Tyres	2	2	4
Weight (without Load)	700 kg	1000kg	1400kg
Lift Capacity	3=1/2 ton	6 ton	12 ton





MULTI CROP BED PLANTER NZI-810

Multi crop bed planter used for sowing the Seeds (Wheat, Maize, Sorghum, Soya bean, Grams, Peas & other Beans etc.) with Fertilizer on the Beds / Plane fields. 3-Furrow openers at the front with main frame to make the Ridges (adjustable / removable)

Specification of Multi Crop Bed Planter

Type: Rear Mounted
 Tractor hp require: 50hp or above
 Main Frame Width: 7-feet
 Box Width (seed & fertilizer): 5-feet
 Box Capacity: 100kg
 Metering unit Mechanism: Steel with Solid Metal Brass
 Power Transmission System: With Rear Ground Drive Wheel Available in 2, 3 & 4 Rows on each bed




SWINGING DRAW BAR NZI-811

Ideal gadget for towing any type of frame load including trailed implement, by attaching it to a tractor under center axle housing can be fitted to MF-240, MF-260, MF 375-E, MF-385 and MF-385 4WD tractors.

The swinging draw bar conforms with British standard having a Clevis hitch Point at 36 mm (14 inch) from the PTO shaft.

The maximum static load for the draw bar is 771kg (1700 Lb) with the draw bar in the outer Position and 998 Kg (2200 Lbs) in the inner Position . The draw bar height is adjustable in relation to the PTO center Line.

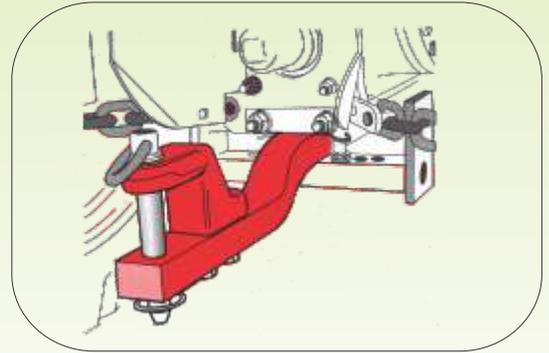


SEED DRILL NZI 812

The Seed Drill is simple to use, reliable, sturdily built and requires very little maintenance. This model is suitable for 50 to 100 HP tractors.

Features:

- Conventional mechanical seed drill
- Double Action
- Fine and large dosing rollers combined for small and large seeds
- Seed and Fertilizer distributor
- Double line with springs
- Wheels with soil scraper.
- 11 tine zero Tillage

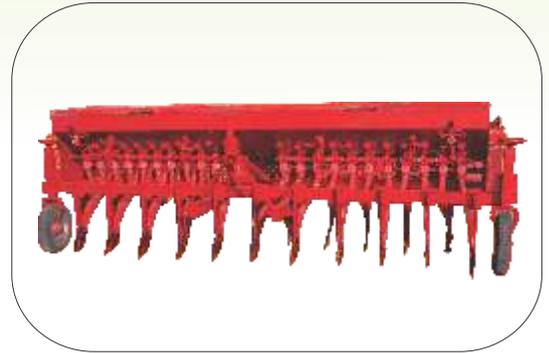

AGRICULTURAL LOADER NZI-813

A multipurpose rugged and Powerful machine which can be quickly attached / detached to the front of Massey Ferguson Tractors for handling / loading stone / brick crush, garbage, sand grains, wood logs etc. into a truck or trailer.

Tractor Compatibility	For MF 375S/385	for MF 240/260
Bucket Type	Close Earth Bucket with digging teet	
Lifting Tune	3-6 Seconds	0.5 Cu. Meter
Max Lift Capacity	1000kg	750 kg.
Operation	hydraulic	Hydraulic
Lift Hieight at Pivot Point	(10'-6") 3 meter	
Lift Ram	2 double acting	
Bucket Ram	Single doubling action	



FRONT BLADE NZI-814

The Power dozers are operated hydraulically by single or double acting rams, once fitted cane be left in position enabling the sub-frame and blade to be quickly removed and attached the blade is fitted with a reversible and replaceable cutting edge of high carbon steel.

Specification:

Power dozer to fit MF 240, 260, 375E, 385 tractor (Model NZI-08/1=6"x22" (Single ram)
 Model NZI -08/2=6 1/2x30" (Twin ram)
 Hydraulic Ram Heavy duty, double action
 Control Valve Open Center double acting spool valve
 Blade Movement Maximum lift 533 mm (21") Maximum depth below ground 102 mm (4")





POST HOLE DIGGER NZI-815

Post Hole Digger is a PTO driven machine that digs holes in rows on equal distance mechanically and economically, best suited for free plantation. Also can be used for hole making for electric poles and farm hedges. It can about 90 cm deep hole of even diameter in just 30 second by detaching Augers, it can used as a small cane.

Specification:

Auger Size	9" & 18"
Hole Depth	90 cm (36")
Weight	164 kg withy 9" Augers & 187 kg withy 18" Augers
Tractor Compatibility	MF-240, 260, 375S & 385



POTATO PLANTER NZI-816

Specifications:

	Two Rows	Four Rows
Horse Power Required	50 hp & above	85 hp & above
Seed Capacity	240 kg	600 kg
Fertilizer Box	150 kg	300 kg
Distribution Through Silver Aluminum	4 Nos.	8 Nos.
Speed 1	1440 kg	2800 kg
Speed 2	1680 kg	3360 kg
Speed 3	1920 kg	3840 kg
Line to Line Distance	28, 29, 30, inches	28, 29, 30, inches
Seed to Seed Spacing	6 inches	6 inches



ROTAVATOR NZI-817

Tractor Driven Rotavator is very helpful for the farmers for cultivation. It is used for shallow tilling and covering on the Stalinized soil to prevent the salt in the soil. The machine will fulfill the working of cleaning stubbles and weeds, turning and covering green fertilizer and preparing vegetable fields etc.

Specifications :

Type	: Tractor Mounted
Tractor power	: 50 - 85 HP
Power transmission system	: Gear train with lubrication housing and cover.
U-J shaft	: 1 No.
Safety clutch	: Disk type, spring loaded, and overload slip clutch with protection cover.
Available In	: 36-Blades, 42-Blades, 48-Blades, 54-Blades, 60 Blades
Features :	: Smooth performance, High Efficiency, Low oil consumption




CHISEL PLOUGH NZI-818

The Chisel Plough is primary tillage deep plough, working to ensure development of crop root system at proper depth and environment it is ideal implement where top soil is fertile but subsoil is not productive a 50 to 85 hp tractor would be required a medium (50 hp) tractor will plough 12" in the first pass and full 20" depth will be attained in the second pass.

Specification:

1. Heavy steel box V-type frame without any nut and bolt
2. Three easily replaceable tines designed to penetrate upto 20" without much effort
3. Shoveles easily replaceable. 4. Working width 1.20 Meters.
5. Tractor compatibility 50-85hp

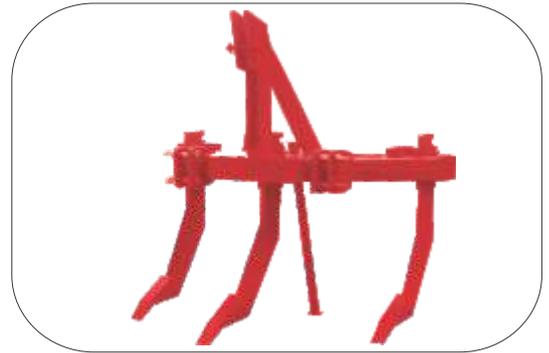

MOULD BOARD PLOUGH NZI-819

The most important plough for primary tillage in canal irrigated or heavy rain areas where too mush weeds grow the objective for ploughing with a mould board is to completely invert and qulvENZE the soil, up-root all weeds, trash and crop residues and bury them.

Specification:

Models	NZI-02 (M)	NZI-02 (H)
Max Depth	22 cms	25 cms
Working Width	85 cms	90 cms
Weight	225kg	335 kgs.
Tractor compatibility	25 to 50 HP	60 Plus HP
Linkage Category	I	II





OFFSET DISC HARROW MODEL NZI-820

The offset Disc Harrow has a heavier weight per Disc and thus have the penetration ability to break down large clods normally left after disc ploughing or Chisel Ploughing in hard grounds. It is a robust construction.

Specification:

Models	NZI-03 (M)	NZI-03 (H)
No. of discs	14 Discs	16 Discs
Disc Size	61 cm (24")	61 cm (24")
Weight	590 kgs.	685 kgs.
Working width	145 cm (57")	167.5 cm (66")
Tractor Compatibility	50 HP	60-85 HP.



RIDGER NZI -821

Used for making ridges for planting tobacco, potato and other vegetable the ridge is fully adjustable for giving different accurate row widths to obtain the correct ridge profile and retain soil flow, the high grade mould boards are adjustable. The ridge can also be used for earthing up the crops sown in rows.

Specification:

Max Row	711 m (Decreasing in increments of 25 mm)
Depth	1.778 mm
Clearance (under frame)	550 mm
Weight	145 Kg
Tractor Compatibility	45-85HP



DISC PLOUGH. NZI-822

Used for deep ploughing in root-infested, sticky, stony, and hard soils. Mixes remains of crops and weeds throughout the depth of ploughing, hence it is ideal for rain-fed areas for checking soil erosion by water and wind.

Specification:

Frame Type	Tubular seamless steel pipe	Furrow wheel dia	508 mm
Number of furrow	2,2+1, 3, 3+1	Plain discs	660mm-inside or outside bevel
Furrow width	254mm	Bearings	tapper roller
Max. working depth	300 mm	Weight	360 kg (3 Furrow)
Longitudinal clearance	522 mm		
Tractor Compatibility	50 to 85 HP		



TINE TILLERS NZI-823

Ideal for general cultivating, weeding, pasture renovating and preparing seed beds. The tiller is available in 4 widths: 9, 11, 13 and 15 tines. The tiller is fully mounted on the tractor by means of category I or II three point hitch pins. The spring-loaded tines swing back under break-away pressure of 163Kg; pass over the obstruction and return to the working position without affecting the working depth of the implement. The continual flexing action of the tines shatters the soil breaking up the clods. The tiller is fitted with 51 mm reversible shovels which are designed for deep penetration. A working depth upto 229 mm is possible in most soils and is simply controlled while sitting on the tractor seat.



MILLAT GENERATING SET (15 - 40 KVA) NZI-824

Reliable Millat Diesel engine (Manufactured under Perkins (UK) Technology) and Leroy Somer alternator (France). Reliable source of Economical Power Generation. Ideal for Operation theatres, Filling Stations, Showroom, Offices and Residences. Availability of Spares with AMS, ATS panels and sound proof canopy.





A project of zaok group

Naeem Zafar Industries

**Deals in Agricultural
Tractor, Machinery
& Implements**

8-km. Sheikhpura Road, Lahore-Pakistan

Tel: +92 42 3791 1824 Fax: +92 42 3791 1441

Cell: +92 321 2223 134, +92 321 9460 970

E-mail: info@nzindustries.com
zafarnzee@hotmail.com

www.nzindustires.com